




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unter-  
lagen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02021498.7

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

27/11/02

BEST AVAILABLE COPY



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.: 02021498.7  
Application no.:  
Demande n°:

Anmeldetag: 26/09/02  
Date of filing:  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
SIEMENS AKTIENGESELLSCHAFT  
80333 München  
GERMANY

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Method and apparatus for carrying out diagnosis of a technical installation

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing:  
Etats contractants désignés lors du dépôt:

AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR

Bemerkungen:  
Remarks:  
Remarques:

200215665

1

## Description

Method and Apparatus for carrying out diagnosis of a technical installation

5

### Background of the invention

In industrial plants, condition monitoring of main systems, sub-systems and components is essential to guarantee reliable operation.

10

In order to adjust operation parameters, schedule maintenance and repair, and to minimize safety risks, accurate data about the condition of numerous plant assets must be gathered and analyzed. The nature of data needed is manifold.

15

Typical examples are vibration data (e. g. turbines or pumps), temperature data, (e. g. boiler), volume data (e. g. throughput of a pipeline).

There are technical means to collect most of the desired data. However, for a complete picture, the amount of data needed is enormous.

This is a problem both in terms of installation costs of sensors, and in terms of efforts to analyze the resulting sensor data. As a consequence, the majority of plant owners cannot afford an all-embracing monitoring of all plant assets. Therefore, unscheduled drop outs of production are inevitable, often resulting in high penalties.

20

25

### 30 State-of-the-Art approaches to the problem

Condition monitoring in industrial plants is widely being carried out by two methods:

- 35 • Sensors attached at the components to be monitored collect data and report e.g. on-line or off-line statuses.

200215665

2

Such sensors can be vibration sensors for rotating machinery or thermography (e.g. temperature) sensors for boilers. If a component is monitored on-line, sensors are connected to an evaluation system, which analyzes the data and prompts appropriate messages to the operator.

- 5 Off-line sensors do not necessarily need to be connected to an evaluation system; data can be collected on demand.

- Any kind of sensor based monitoring is in general extremely costly. Not only the actual technical equipment needed, but also the appropriate commissioning and adjusting of the sensor to the specific needs and environmental conditions, take more effort than typical plant owners are able or willing to spend.

- 15 And/or

- Specialist engineers inspect machinery by frequent walk downs.
- 20 The main "sensor" used for inspection here is human perception. Due to their knowledge and experience, these engineers are able to detect a broad range of failures. However, symptoms of many failures simply cannot be sensed without technical aids, for example, bearings, which start becoming faulty or change of magnetic flux in a pump.
- 25 Furthermore, long term changes in a machine's component characteristic is very hard for a human being to sense, since there is no direct comparison available with a regular operation mode.

30

#### Embodiments of the invention

Sub-systems / machinery components are designed in such a way that they indicate faults acoustically and/or optically.

35

Instead of attaching sensors to machinery which display measured data on a screen or on legacy computer systems, machin-

200215665

3

ery is designed such that faults can clearly be identified by characteristic sounds and/or that a machine's components are designed in such a way that they change their outer appearance, e.g. with regard to their coating color, when a fault occurs.

Each type of fault may e.g. cause a unique sound ("groan"), i. e. the sound's frequency and / or its volume should allow identifying the fault without ambiguity. The sounds should be identifiable by personnel without technical aids such as vibration monitoring devices or sound analysis systems.

Alternatively or in combination therewith each type of fault may cause an optical signal assigned to said failure.

This enables a person carrying out a plant walk down to also detect faults which normally would be not be sensible by human perception.

For this monitoring method no costly additional sensors are required since machinery by design makes faults obvious for plant personnel. Therefore, walk downs are much more effective and give a more comprehensive image of a plant's condition.

Without plant-wide sensor installations, plant operators receive all information for making operational and maintenance decisions.

#### Examples:

- Rotating machinery, such as pumps or fans, are designed such that faults in their bearings lead to characteristic noises. This can be achieved by designing the casing such that faulty bearings result in body resonance effects. Faults in different bearings result in different resonance frequencies.

Such resonance effects can be made perceivable for human beings for example by attaching plates to the casing which

200215665

4

vibrate according to body resonance of the casing (see figure 1 for an example of application).

- Supports of pipelines are often designed to adjust flexibly when the pipeline expands due to a change of its temperature.

Abnormal temperature changes lead to abnormal adjustment of the support. A characteristic squeaking of the support would make such abnormal temperature changes audible to plant personnel.

- Electrical machinery produce well defined electric-magnetic flux.

A flux sensitive coating may change color when the flux differs from the expected flux. Such discrepancies indicate the type of fault inside the machine, i. e. faulty rotors in electrical engines.

- Temperature sensitive coatings may change their color and thus reflect discrepancies from normal temperatures of machinery.

An abnormal local temperature in a specific area on a machine's surface may thus give hints to the type and location of a fault.

For example, local temperature discrepancies in a rotating machine can indicate a faulty bearing.

- Vessels containing liquid of noticeable color can be attached to components of a technical installation. The vessels and the way of attachment are designed in such a way that the vessel breaks when the machinery or a particular material suffers excessive strain, for example due to vibration.

The liquid leaking from the machine's component is an optical indication for the strain the component is or was exposed to (see figures 2 and 3 for an example application).

200215665

5

The advantages of the invention compared to sensor based condition monitoring include cost saving and data reduction.

- 5 Machinery designed to indicate faults acoustically and/or optically do not require additional sensors to monitor their status.
- Since only faults are reported by walk down personnel, and no data are reported on machinery which works faultlessly, the
- 10 amount of data to be processed in evaluation and analysis systems is reduced.

#### Figures

- 15 Figure 1 shows an example of a pump's design, which indicates a faulty bearing acoustically.
- At the casing, a plate is fixed in such a way, that it can swing when activated by its resonance frequency, and cause characteristic noise by hitting e.g. a metal stub on the casing.
- 20 The plate is dimensioned in such a way that it has the same body resonance frequency as the vibration frequency caused by a faulty bearing.
- Hence, a faulty bearing causes the plate to swing and produce
- 25 a characteristic noise.

- Figures 2 and 3 show a vessel, filled with liquid, which is fixed on a steel construction by three fixations (figure 2).
- When the material of the steel construction is over-stressed, e. g. by putting weight on top, the vessel breaks and the
- 30 liquid inside the vessel spills and thus gives indication for excessive stress the steel construction has suffered (figure 3).

200215665

6

## Claims

1. Method for carrying out diagnosis of a technical installation,  
5 characterized in that at least one acoustical signal assigned to ~~at least one specific failure of at least one~~ component of the technical installation is acquired, whereby the acoustical signal is being produced by a device assigned to said component and the device is being  
10 activated mechanically in case of occurrence of said failure.
2. Method according to claim 1,  
15 characterized in that the device includes a plate capable of vibrating within hearing frequency range, said vibration frequency being characteristic for said specific failure.
3. Method according to claim 1 or 2,  
20 characterized in that a number of devices are provided, each device being assigned to a specific failure.
4. Apparatus for carrying out diagnosis of a technical installation,  
25 comprising at least one device assigned to at least one component of the technical installation for producing an acoustical signal characteristic for at least one specific failure of said component, whereby the device is activated  
30 mechanically in case of occurrence of said failure.
5. Apparatus according to claim 3,  
characterized in that the device includes a plate capable  
of vibrating within hearing frequency range, said vibration  
35 frequency being characteristic for said specific failure.
6. Apparatus according to claim 4 or 5,



200215665

7

characterized in that a number of devices are provided,  
each device being assigned to a specific failure.

7. Method for carrying out diagnosis of a technical installation,  
5        characterized in that at least one optical signal assigned  
to at least one specific failure of at least one component  
of the technical installation is acquired, whereby the op-  
tical signal is being produced by a device assigned to  
10       said component and the device is being activated mechan-  
ically in case of occurrence of said failure.
8. Method according to claim 7,  
15       characterized in that the device includes a vessel con-  
taining a liquid, the vessel being capable of breaking if  
stress endured by said component exceeds a fixed value.
9. Method according to claim 7 or 8,  
20       characterized in that a number of devices are provided,  
each device being assigned to a specific failure.
10. Apparatus for carrying out diagnosis of a technical in-  
stallation,  
25       comprising at least one device assigned to at least one  
component of the technical installation for producing an  
optical signal characteristic for at least one specific  
failure of said component, whereby the device is activated  
mechanically in case of occurrence of said failure.
- 30 11. Apparatus according to claim 10,  
characterized in that the device includes a vessel con-  
taining a liquid, the vessel being capable of breaking if  
stress endured by said component exceeds a fixed value.

26.SEP.2002 11:19

ZT PA 1 / ZT PA 5

NR.365 S.14

200215665

8

12. Apparatus according to claim 10 or 11,  
characterized in that a number of devices are provided,  
each device being assigned to a specific failure.

200215665

9

Abstract

Method and Apparatus for carrying out diagnosis of a technical installation

- 5 A specific failure occurring during operation of a technical installation is detected by acquiring an acoustic and/or optical signal emitted by a device assigned to at least one component of the technical installation whereby the device is  
10 being activated mechanically.

FIG 1

10


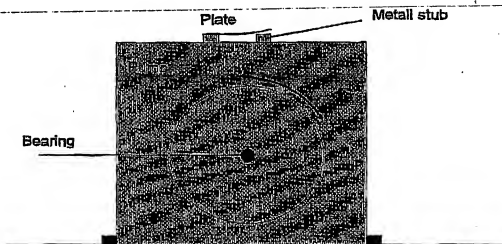


Figure 1

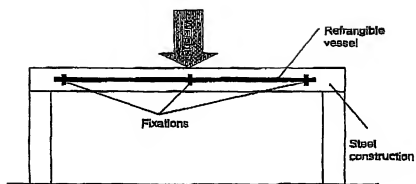

BEST AVAILABLE COPY

Figure 2

25.SEP.2002 11:19

ZT PA 1 / ZT PA 5

200215665

NR.365 S.17

11

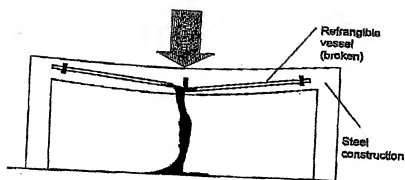


Figure 3

BEST AVAILABLE COPY

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**